

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/050258 A1

(51) International Patent Classification⁷: **G01V 15/00**

(21) International Application Number:
PCT/IB2004/052254

(22) International Filing Date:
1 November 2004 (01.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
200301724 21 November 2003 (21.11.2003) DK

(71) Applicant and
(72) Inventor: **JOERGENSEN, Poul Richter** [DK/DK];
Saugskærvej 16 Thurø, DK-5700 Svendborg (DK).

(74) Agent: **BUDDE, SCHOU & OSTENFELD A/S**; Vester
Søgade 10, DK-1601 Copenhagen V. (DK).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,


AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,
SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: MARKING TAPE WITH PASSIVE RESONANT CIRCUITS AND METHODS OF USE

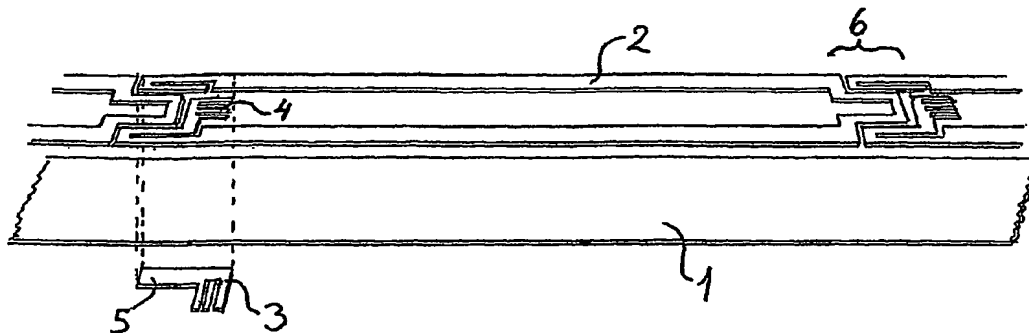

(57) Abstract: A marking tape comprising at least one resonant circuit, each resonant circuit comprising an inductive coil and a capacitor, forming a resonant circuit of a selected frequency, comprises inductive coils and capacitors formed by conductive material layers (2, 3, 4) on the surfaces of a dielectric plastic film (1) and is dimensioned to be wireless detected when positioned in a hidden location. Such marking tape can be produced with low cost and provide a wireless detection of the integrity of a marking tape in a hidden position, e.g. from the surface above a subterranean positioned marking tape.

WO 2005/050258 A1